



Double diaphragm pump ZIP 52 with wallholder



schütze
SPRAYTECHNOLOGY

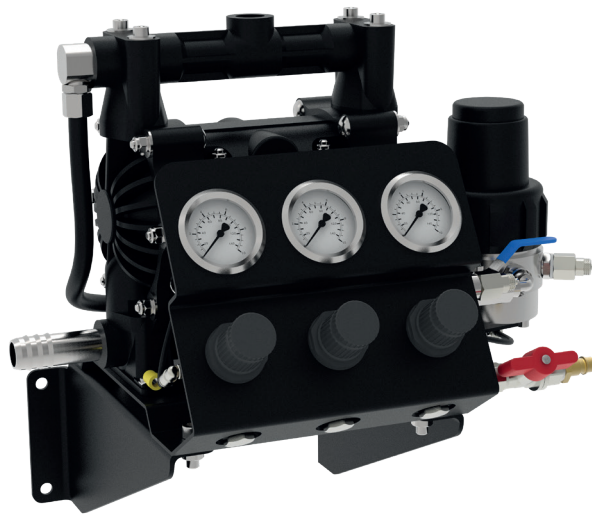

Double diaphragm pump ZIP 52 with wallholder

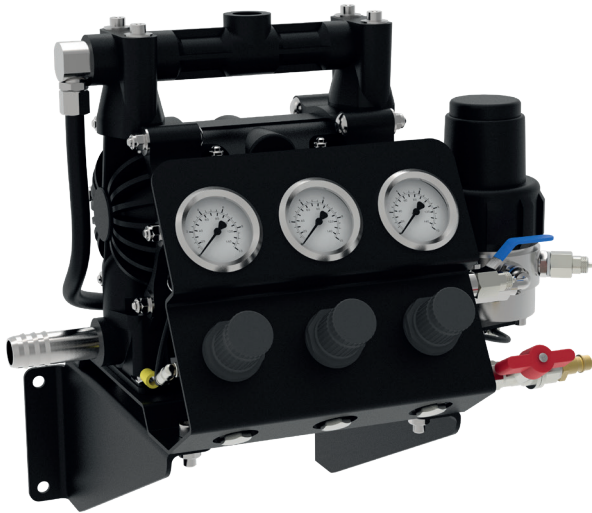

The double diaphragm pump ZIP 52 is the result of consequential further development of existing diaphragm pumps. Mounted on wallholder the pump ZIP 52 can be easily attached to a wall. It is perfect applicable for continuous feeding of fluids as f.i. release agents, oils, glues etc.

Advantages of pump ZIP 52:

- low air consumption
- low noise level
- anti-stalling pilot valve
- high flow rate (up to 52 ltr./min.)
- new „long life“ diaphragms
- o-rings in contact with fluids are made of PTFE
- compact pump size
- all regulators clearly arranged
- pump body made of conductive plastic
- easy mounting on walls with wallholder
- optional with trolley or pressure tank

Technical data:

Pressure ratio:	1:1
Working fluid pressure:	max. 7.8 bar
Inlet air pressure:	1 – 8 bar
Flow rate:	max. 52 lpm
Measurements (with wallholder):	360 x 295 x 365 mm
Weight:	approx 11.2 kg

Special designs on request.
Technical alterations reserved.
For further information please contact us.